
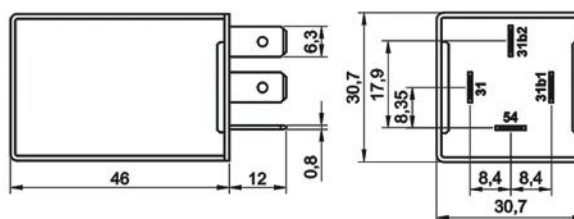


Intermittent Wiper Relay - 5 seconds

Product Code

201.003.058 - 12V**201.003.063 - 24V****Terminal Configuration & Dimensions & Diagram****Accessories**

- 207.140.251 Socket – 5 Terminals, 4 Cables - Black (Standard cable length 20 cm & cable cross section 1,50 mm²)*
 207.100.003 Socket – 5 Terminals – Black & Blue/ Pack of 2
 207.100.001 Socket – 5 Terminals – Black
 207.100.002 Socket – 5 Terminals – Blue

* Indicates cross section of cables carrying higher current. Please refer to **Socket Product Group** pages for different alternatives.

Technical Data

	201.003.058	201.003.063
Nominal Voltage	12V	24V
Operating Voltage	10,0 - 16,0Vdc	20,0 - 30,0Vdc
Rated Contact Current	10A	10A
Load Power	140W	280W
Interval Period	5 seconds	5 seconds
Dielectric Strength	>1000Vdc	>1000Vdc
Vibration	20-200Hz,5g;>10us	20-200Hz,5g;>10us
Mechanical Shock	>10g, 11ms>10us	>10g, 11ms>10us
IP Rating	IP54 DIN IEC60529	IP54 DIN IEC60529
Terminals	6,3 x 0,8 mm	6,3 x 0,8mm
Terminals / Plating	Fe/E-Sn	Fe/E-Sn
Bracket / Plating	-	-
Ambient Temperature	- 40 / + 80 °C	- 40 / + 80 °C

Product Details

Even when the windscreen wipers are operating at the slowest speed, the blades may wipe when the windshield is dry due to low rainfall. This causes the wiper blades to wear out too quickly as well as abrasion of the windshield. Especially in vehicles with a rear window wiper, the wiping intervals must be longer.

After ELO Intermittent Wiper Relay is activated, the blades complete first round of wiping and continue operation with 5 second intervals.

Notes

All measurements are in millimeters.